

KEITH® WALKING FLOOR® systems are available in a wide range of profiles and thicknesses to address the vast number of applications that are in use worldwide. A general description of uses, applications, and benefits to each system is below.

- Heavy abrasion applications (Steel Slat only)
- Full length bearing strip
- Leak resistant
- No floor seal

- Aluminum V-9 Slat typically used for MSW, recyclables, and light C&D
- Steel V-9 Slat designed for use in heavy C&D, scrap metal, aggregate, and asphalt

## **V-9 SERIES** ALUMINUM 5661701 2531

# V-18 SERIES



2651 2654



- Full length hold-down
- Full length bearing strip
- Leak resistant
- No floor seal
- Used for MSW, biomass, light to moderate C&D
- -Available in thicknesses ranging from 3/8" to 1/2" triple ridge

(Note: Steel wear strip needed when hauling highly abrasive materials.)

- Original WALKING FLOOR® slat profile
- Wide range of profile types
- Interchangeable slat designs
- Used for shredded paper, MSW, recyclables, biofuels, and light to moderate C&D, wood forest products
- -Available in thicknesses ranging from 1/8" to 3/4" triple ridge



2185

2295



#### PRESSURE SEAL®



2236






- Light weight
- No floor seal
- Full length bearing
- Full length hold-down
- Used for agricultural, commodity, biomass, and mulch
- -Available in thicknesses ranging from 1/8" to 1/4"


- Designed for high moisture loads.
- Can hold 12" of standing water
- Front mount drive
- Full length bearing strip
- Full length hold-down
- Used for MSW, medical waste and silage

### **LEAKPROOF (LPIII)**



#### **MOBILE APPLICATIONS**

#### COMMON FLOORING AND COMPONENTS

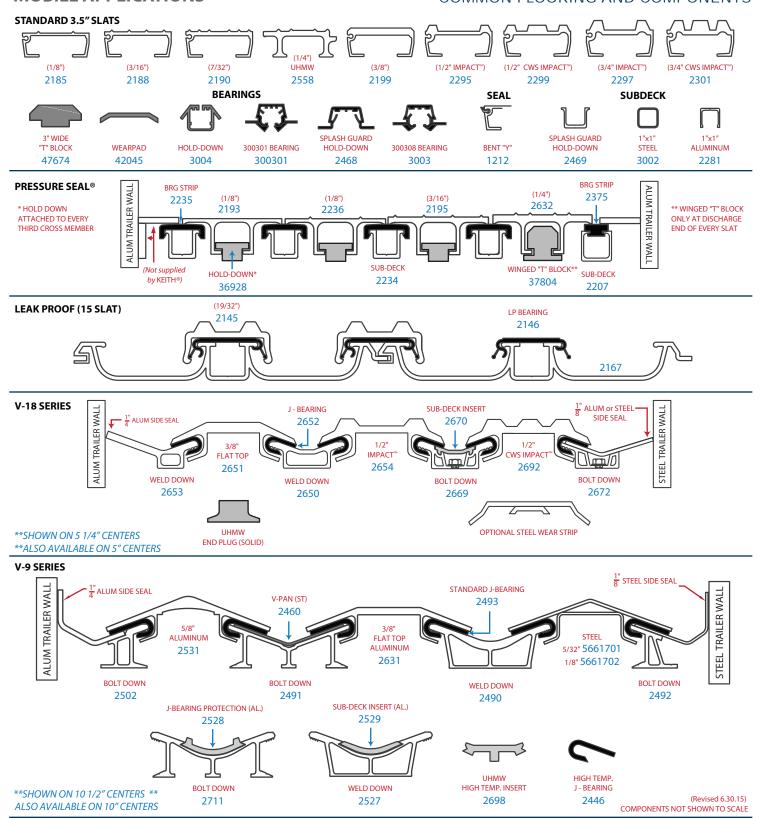





#### www.keithwalkingfloor.com

KEITH Mfg. Co. WORLD HEADQUARTERS

(800) 547-6161 (541) 475-3802 (541) 475-2169 fax sales@keithwalkingfloor.com